


CUSTOM IW 106

Product specification sheet

Aluminum grille
Can be painted

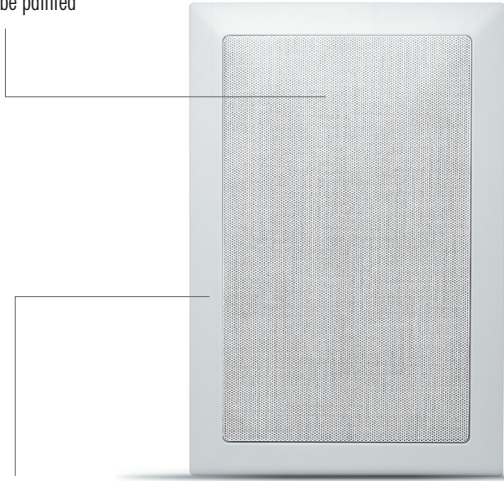

Reinforced white ABS chassis
- Very low vibration
- Can be painted.

Adjustable tweeter level
Adjustable from -3 dB to +3 dB




Aluminum inverted dome swivel tweeter
- Extended response to 20kHz
- Low directivity

6-1/2" (165mm) Fiberglass woofers
High power handling


FEATURES

- 100 % Focal technologies.
- High power handling.
- Easy integration.
- Wall cut-out template supplied.
- Paint mask supplied.
- Autoreset polyswitch fuse.
- Splashproof, design to work in wet environment.
- The Focal sound.



Wall bracket mounting
Quick and easy mounting

| | |
|-----------------------------|--|
| Type | In-wall speaker |
| Speakers | 6-1/2" (165mm) fiberglass cone midbass 1" (25mm) aluminum inverted dome tweeter |
| Frequency response (+/-3dB) | 60Hz - 20kHz |
| Sensitivity (2,83V/1m) | 89dB |
| Nom. impedance | 8Ω |
| Protection | Autoreset Polyswitch fuse |
| Max. power | 120 Watts |
| Tweeter ajustement | -3dB/ 0dB/ +3dB |
| Crossover frequency | 3300Hz |
| Frame size | (L) 8-1/8" x (H) 12-3/16" (207 x 310mm) |
| Cut-out dimensions (HxW) | (L) 6-11/16" x (H) 10-5/8" (170 x 273mm) |
| Depth from wall | 2-13/16" (71mm) |
| Net weight | 3.4lbs (1.6kg) |



FOCAL
the spirit of sound